


# ProLED.

## T8 Linear Double Ended Bypass Series



Product #: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

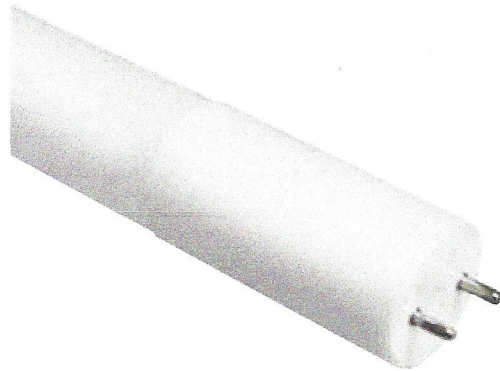

Double Ended Bypass

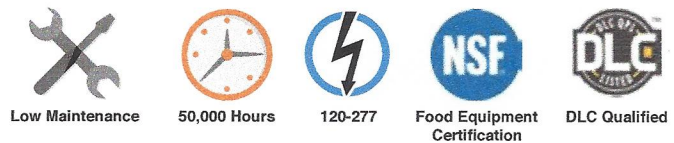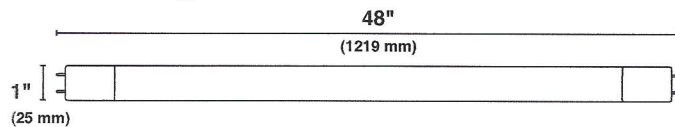


Most reliable and efficient way to retrofit existing Linear Fluorescent T8 and T12 luminaires with simple rewiring

### Specifications

- An internal digital protection system ensures safety and convenience during installation and servicing
- Uses 52% less energy than a standard Fluorescent T8 and lasts up to 66% longer<sup>1</sup>
- Will work with shunted or non-shunted lampholders
- Suitable for use in totally enclosed luminaires
- Double-end powered, operates on 120V-277V line voltage range
- 82 CRI for quality and consistent color rendering
- -20°C (-4°F) to 45°C (113°F) operating temperature range
- Conforms to requirements of NSF/ANSI standard 2-Food equipment
- UL 1598C classified retrofit kit
- UL approved for damp locations

### Savings Comparison

Total Lifetime Costs

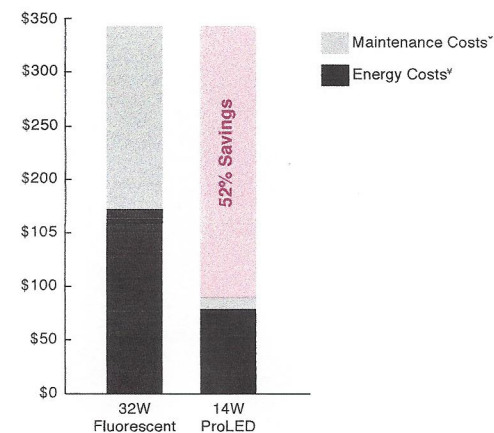

\* Maintenance costs based on 15 minutes at \$40 per/hr  
 \* Energy costs based on \$0.11 kWh

### Ordering Information

Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	MOL	THD	DLC* Qualified	Equivalent Wattage
14	Medium Bi Pin	81886	T8FR14/835/BYP2/DE/LED120-277	3500	82	1700	50,000	270°	1/25	48"	<20%	Yes	32	
14	Medium Bi Pin	81887	T8FR14/840/BYP2/DE/LED120-277	4000	82	1800	50,000	270°	1/25	48"	<20%	Yes	32	
14	Medium Bi Pin	81888	T8FR14/850/BYP2/DE/LED120-277	5000	82	1800	50,000	270°	1/25	48"	<20%	Yes	32	

o NEW ITEM

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase.

Must be operated with an ambient fixture temperature between -4°F(-20°C) and 113°F(45°C).

<sup>1</sup> Energy savings based on \$0.11 kWh over 50,000 hour life.

\*\* Check the latest update at [www.DesignLights.org](http://www.DesignLights.org) for listed product catalog numbers. Not all versions are listed.

### Warning

Halco ProLED Linear T8 will not operate on a linear fluorescent ballast. Please re-wire the luminaire as shown in the installation instructions included with the product.

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | [halcolighting.com](http://halcolighting.com)  
 Atlanta | Carlstadt | Chicago | Cleveland | Houston | Los Angeles | Phoenix

© 2017 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change.

